


INSTALLATION INSTRUCTION FOR ACOUSTIC ENCLOSURES

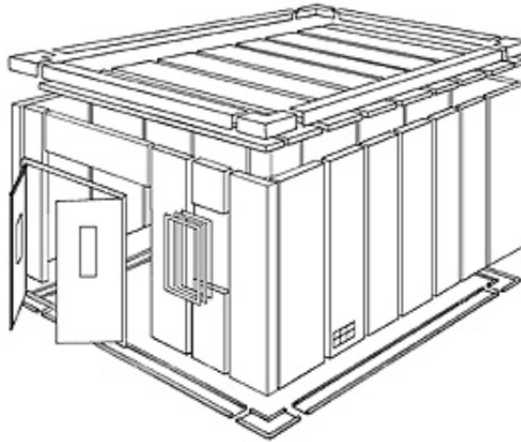

Planning Hints and Notes

1. Review the erection drawings prepared specifically for the job.
2. Bill of materials contains complete list of parts supplied including panels, rim (flashing) and miscellaneous hardware.
3. Before the truckload of panels arrives, clear the area near where the panels are to be erected so they can be conveniently stored. To save time and labor in handling the panels, move panels directly from the truck to this area. Make sure the necessary material handling equipment is available, including lifts for getting the panels off the truck and to the proper floor and carts to move the panels across the floor to the erection site.
4. When panels are stored near the erection area, stack them on end and lengthwise. This will save time moving and restacking panels as the housing is erected. If more than one housing is involved, separate and stack panels by drawing number, which can be found on the label on the end of each panel.